



RBR-2150A

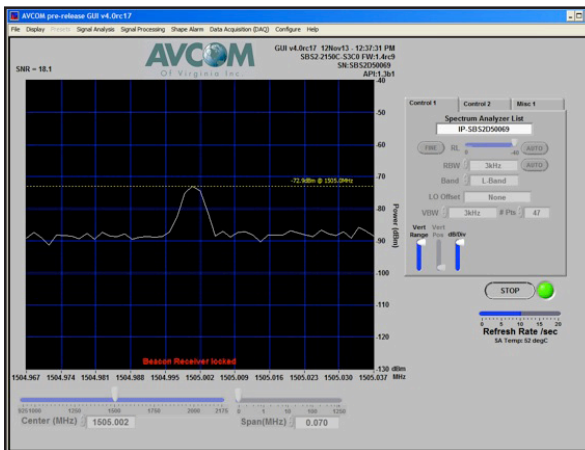

Rackmount Satellite Beacon Receiver

- Beacon Receiver And Spectrum Analyzer In One Package!
- Highly Flexible Configuration
- One Model Supports Many Applications
- Switch Quickly Between Beacon Receiver And Spectrum Analyzer Modes
- Monitoring & Control (M&C) via Ethernet and USB
- Beacon Receiver support integrated into the Latest Avcom GUI
- Comprehensive API for Easy Integration
- Extended Temperature Range

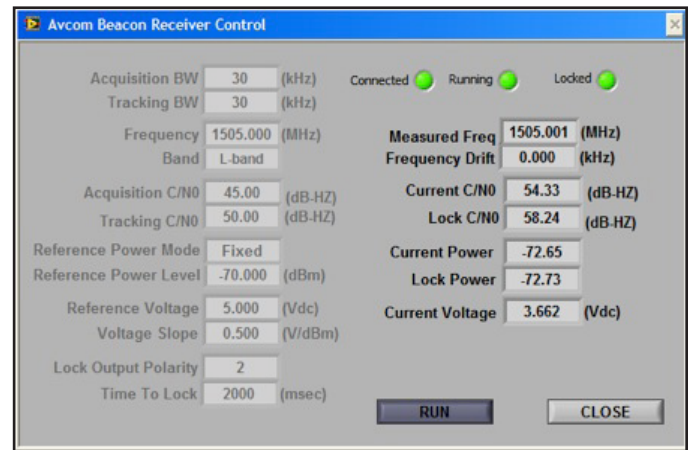

RBR Beacon Receiver, Rack Mount

The RBR Series is a Beacon Receiver based on the high-performing single-board Spectrum Analyzers and Beacon Receiver (SBS) products. Avcom has integrated the SBS product into a standard 19" rack enclosure. The RBR product provides same high performance of the MIL-spec compliant SBS module product in a convenient rack enclosure, all at a cost effective price. This enables the user to install the RBR in any standard 19" rack system and access the spectrum analyzer and beacon receiver functions via the included software GUI over IP.

TECHNICAL SPECIFICATIONS

RF

INPUT CONNECTOR:	BNC standard. N, TNC, F, & SMA available.
INPUT FREQUENCY RANGE:	950 to 2150MHz
TUNING STEP SIZE:	1kHz
INPUT LEVEL RANGE:	0 to -115dBm
MAXIMUM INPUT POWER LEVEL:	+10 dBm max
DETECTION BANDWIDTH:	10 to 750 kHz
TRACKING BANDWIDTH:	10 to 120 kHz
DETECTED BEACON LEVEL FILTERING:	Low-Pass, 0.5 Hz, fixed

TECHNICAL SPECIFICATIONS

PERFORMANCE		
SEARCH/TRACK RATE:	10 Hz	
ACQUISITION TIME:	<2 second typical	
ADJUSTABLE DELAY BEFORE LOCK:	0 to 5000 milliseconds	
BEACON TYPE:	CW, BPSK	
ACQUISITION/TRACKING LEVEL:		
User Bandwidth	RBW Filter	Min C/No
≤ ± 37 kHz	3kHz	40 dB-Hz
≤ ± 92 kHz	10kHz	44 dB-Hz
≤ ± 375 kHz	30kHz	48 dB-Hz
M & C		
ETHERNET:	10/100 Auto, RJ-45 and 8-pin header	
IP ADDRESS:	DHCP or Static	
USB:	Type-B	
INCLUDED CONTROL APPLICATION:	Avcom GUI (Windows)	
APPLICATION PROGRAMMING INTERFACE (API):	POSIX-compliant 'C' Pre-built Libraries for Windows and Linux x86 Source code available	
PROTOCOL:	High-reliability closed-loop with error checking	
RECEIVER OUTPUT VIA PHYSICAL OUTPUTS?	Yes	
RECEIVER OUTPUT VIA M&C INTERFACE:	Yes	
RECEIVER OUTPUTS		
CONNECTOR:	Analog: BNC, Lock: DB-9	
ANALOG SIGNAL STRENGTH INDICATOR OUTPUT LEVEL:	0 to 10 VDC, 5 mA max to maintain linearity	
ANALOG SLOPE:	0.25 to 2.5 Volts/dB	
ANALOG SLOPE POLARITY:	Positive or Negative	
ANALOG OUTPUT FILTERING:	Low-Pass, 0.5 Hz, fixed	
DIGITAL LOCK INDICATOR OUTPUT:	0 to 3.3 VDC	
DIGITAL LOCK INDICATOR OUTPUT POLARITY:	Adjustable (H=LOCK or L=LOCK)	
POWER		
CONNECTOR:	2.1mm DC	
POWER SUPPLY:	15 VDC, 7W	
PHYSICAL		
DIMENSIONS:	19"W x 18"L x 1.75"H	
WEIGHT:	7lbs	
ENVIRONMENTAL		
OPERATING TEMPERATURE:	-20 to +60C	
STORAGE TEMPERATURE:	-40 to +85C	
HUMIDITY:	0 to 95%, non-condensing	

Specifications subject to change. ©2019 Avcom of Virginia, Inc. v043019