

Portable Spectrum Analyzers (with display)
All PSA models are battery operated and include the following:

- Full VGA Color LCD
- 4 RBW's
- LNB Power 13/18VDC with 22KHz
- Serial Communications

One model available:


MODEL	FREQUENCY RANGE	CODE
PSA-2500C	5MHz-2500MHz wide band	2500


The following options are available:

OPTION	DESCRIPTION	CODE
Number Of Inputs	Single Input	1
	Dual Input	2
Input Connector Type (Female)	BNC	B
	TNC	T
	N	N
	SMA	S
	F	F
LNB Power	13V/18V 22Khz	L
Ethernet	Ethernet port on rear of unit	E

Sample part number:

PSA-2500C2SLE

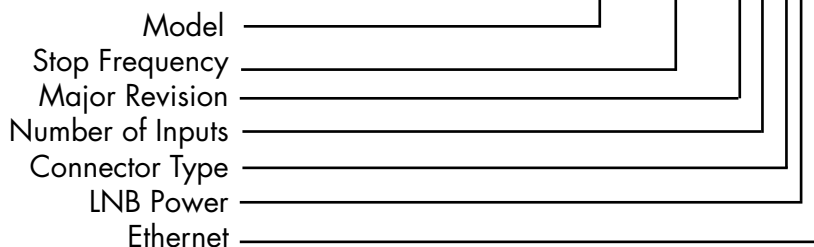

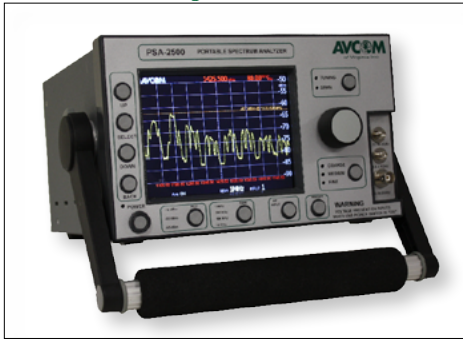

Portable Spectrum Analyzers (with display) *EXTENDED SERIES*

All PSA models are battery operated and include the following:

- Full VGA Color LCD
- 4 RBW's
- LNB Power 13/18VDC with 22KHz
- Serial Communications

MODEL	FREQUENCY RANGE	CODE
PSA-4200C	5MHz-4200MHz	4200

MODEL	FREQUENCY RANGE
PSA-2500-CTX	5MHz-2500MHz & 5.5GHz - 6.5GHz
PSA-2500-KUTX	5MHz-2500MHz & 13.75GHz - 14.5GHz
PSA-2500-CKUTX	5MHz-2500MHz, 5.5 - 6.5GHz, & 13.75 - 14.5GHz


The following options are available:

OPTION	DESCRIPTION	CODE
Input Connector Type (Female)*	BNC	B
	TNC	T
	N	N
	SMA	S
	F	F
Ethernet	Ethernet port	E

*Other input connector options are only available for inputs with 5-2500MHz frequency.

PSA Accessories

MODEL	DESCRIPTION
AVSAC-3	Black Nylon carrying case for the current PSA series units
AVSAC-42	Black Nylon carrying case for the PSA-4200 and Extended Series units
QRM-2000	Rackmount kit for PSA series

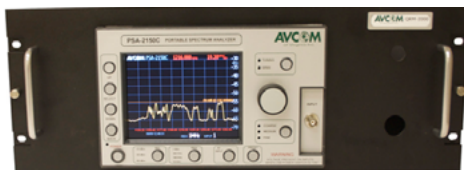

QRM-2000



AVSAC